

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 211 883 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

05.06.2002 Bulletin 2002/23

(51) Int Cl.7: **H04N 1/46**(21) Application number: **01309746.4**(22) Date of filing: **19.11.2001**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

Designated Extension States:

AL LT LV MK RO SI• **Makita, Takeshi, c/o Canon K.K.****Ohta-ku, Tokyo (JP)**• **Yamada, Osamu, c/o Canon K.K.****Ohta-ku, Tokyo (JP)**(30) Priority: **22.11.2000 JP 2000356144**(71) Applicant: **CANON KABUSHIKI KAISHA
Tokyo (JP)**

(74) Representative:


Beresford, Keith Denis Lewis et al**Beresford & Co.,****2-5 Warwick Court,****High Holborn****London WC1R 5DJ (GB)**

(72) Inventors:

• **Iida, Yoshiko, c/o Canon K.K.****Ohta-ku, Tokyo (JP)**(54) **Colour image processing method**

(57) Input and output units using different signal processing systems cannot be connected to a single image input apparatus. On the basis of the signal format

of image data acquired by the input unit and the signal format of image data that can be processed by the output unit, the signal format of image data to be supplied from the input unit to the output unit is controlled.

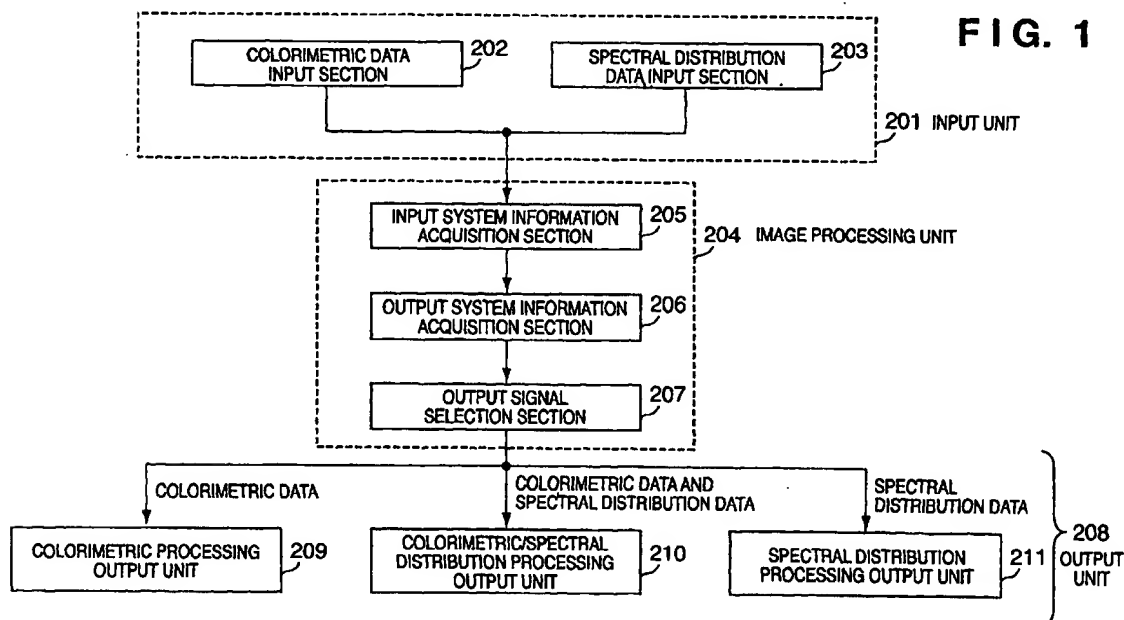

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an image processing apparatus and method thereof and, more particularly, to image processing based on the relationship between an input system and an output system of its image signal.

BACKGROUND OF THE INVENTION

[0002] Along with the recent development of image processing technology, image input apparatuses such as a digital camera for sensing an object and outputting its image signal are showing a remarkable consummation rush.

[0003] Image input apparatuses are roughly classified into a type that processes RGB signals as colorimetric data of an object and a type that executes multiple spectral distribution data processing by estimating the colorimetric data of an object illuminated with ambient light using the spectral distribution data of an object and that of the ambient light with which the object is illuminated. The former requires a short processing time and is advantageous in terms of cost because the processing is simple. On the other hand, the latter requires complex processing and therefore is disadvantageous in processing time and cost, though it can realize more accurate color reproduction.

[0004] Some apparatuses execute simple RGB/spectral distribution data processing while realizing accurate color reproduction by multiple spectral distribution data processing by estimating spectral distribution data on the basis of received RGB signals.

[0005] In each of the above image input apparatuses, the internal signal processing system is limited to one of the RGB signal processing system, multiple spectral distribution data processing system, and RGB/spectral distribution data processing system, and has input and output units corresponding to one of the processing systems. That is, an image input apparatus having an RGB signal processing system has an RGB input unit and RGB output unit. An image input apparatus having a multiple spectral distribution data processing has a spectral distribution input unit and spectral distribution processing unit. An image input apparatus having an RGB/spectral distribution data processing system has an RGB input unit and RGB/spectral distribution processing unit.

[0006] Hence, input and output units for different signal processing systems cannot be connected to a single image input apparatus. For example, an output unit for a spectral distribution data processing system cannot be connected to an input unit for an RGB signal processing system.

SUMMARY OF THE INVENTION

[0007] The present invention has been made to solve the above-described problems individually or altogether, and has as a concern to provide image processing based on the relationship between the signal processing systems of image input and output units.

[0008] According to a preferred aspect of the present invention, the present invention provides an image processing apparatus comprising: an input unit, arranged to input image data; an output unit, arranged to output the image data to an external device; and a controller, arranged to control a signal format of the image data to be supplied from the input unit to the output unit on the basis of a signal format of image data that can be processed by the output unit.

[0009] In a preferred embodiment, the controller acquires information related to an input signal format of image data that can be input by the input unit and information related to an output signal format of the image data that can be processed by the output unit and, on the basis of the acquired information related to the input and output signal formats, controls the signal format of the image data to be supplied from the input unit to the output unit.

[0010] According to another aspect of the present invention provides a converter, arranged to convert the signal format of the image data input from the input unit, wherein when image data having a signal format corresponding to the output signal format is not input from the input unit, the controller supplies image data obtained by converting the signal format by the converter to the output unit.

[0011] Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a block diagram showing the functional arrangement of an image input apparatus according to the first embodiment;

Fig. 2 is a block diagram showing the connection state of each unit;

Fig. 3 is a flow chart showing image input processing;

Fig. 4 is a block diagram showing the functional arrangement of an image input apparatus according to the second embodiment;

Fig. 5 is a graph showing examples of color matching functions;

Fig. 6 is a graph showing an example of an RGB spectral distribution characteristic; and

Fig. 7 is a table showing the correlation between the

signal formats of input and output systems and the signal formats of image data to be output to the output system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] Image input apparatuses according to the embodiments of the present invention will be described below in detail with reference to the accompanying drawings.

First Embodiment

[Arrangement]

[0014] Fig. 1 is a block diagram showing the functional arrangement of an image input apparatus according to the embodiment.

[0015] An input unit 201 for photographing an object and acquiring image data has a colorimetric data input section 202 for acquiring the colorimetric data (RGB data in this embodiment) of each pixel and a spectral distribution data input section 203 for acquiring the spectral distribution data of each pixel. The colorimetric data and spectral distribution data acquired in the input unit 201 are input to an image processing unit 204.

[0016] The image processing unit 204 is constituted by an input system information acquisition section 205 for acquiring characteristic information of the input system (to be referred to as "input system information" hereinafter) such as a signal format in the input unit 201 (to be referred to as an "input signal format" hereinafter), an output system information acquisition section 206 for acquiring characteristic information of the output system (to be referred to as "output system information" hereinafter) such as a signal format in an output unit 208 on the output side (to be referred to as an "output signal format" hereinafter), and an output signal selection section 207 for selecting the signal format of image data to be transferred to the output unit 208 on the basis of the acquired input and output system information. The image processing unit 204 outputs image data having a signal format selected by the output signal selection section 207.

[0017] The image data output from the image processing unit 204 is subjected to appropriate image processing by the output unit 208 and output to an external device. In the first embodiment, as the output unit 208, a plurality of processing units using different processing signal formats can be used. More specifically, one of a colorimetric processing output unit 209 for receiving only colorimetric data and processing/outputting the data, a colorimetric/spectral distribution processing output unit 210 for receiving both colorimetric data and spectral distribution data and processing/outputting the data, and a spectral distribution processing output unit 211 for receiving only spectral distribution

data and processing/outputting the data can be connected to the image processing unit 204 as the output unit 208.

[0018] Fig. 2 is a block diagram showing the connection state of each unit of the image input apparatus shown in Fig. 1.

[0019] Referring to Fig. 2, the input unit 201 has, in addition to the above-described colorimetric data input section 202 and spectral distribution data input section 203, an image processing section 801 for executing processing such as analog-to-digital conversion or shading correction for image data having a signal format, which is acquired by the colorimetric data input section 202 and spectral distribution data input section 203, and a communication interface section 802 for transmitting the processed image data to the image processing unit 204 on the output side.

[0020] The image processing unit 204 has, in addition to a selection processing section 805 formed from the above-described input system information acquisition section 205, output system information acquisition section 206, and output signal selection section 207, an image processing section 804 for executing image processing according to the signal format selected by the selection processing section 805 on the image data, and a communication interface section 803 for transmitting the processed image data to the output unit 208 and receiving image data from the input unit 201.

[0021] The output unit 208 has a communication interface section 806 for receiving image data from the image processing unit 204, an image processing section 807 for analyzing received image data and generating output image data, and an output section 808 for outputting the generated output image data to an external device (not shown).

[0022] As shown in Fig. 2, the units (input unit 201, image processing unit 204, and output unit 208) of the image input apparatus according to the first embodiment can exchange image data and the characteristic information of each unit through the communication interface sections 802, 803, and 806.

[Processing]

[0023] Image input processing in the above-described image input apparatus according to the first embodiment will be described below in detail with reference to Fig. 3.

[0024] Fig. 3 is a flow chart showing processing of causing the input unit 201 to receive colorimetric data and spectral distribution data and output image data having a signal format that can be processed by the output unit 208.

[0025] In step S300, the input unit 201 acquires image data obtained by photographing an object. In the first embodiment, colorimetric data and spectral distribution data are acquired by the colorimetric data input section 202 and spectral distribution data input section 203, re-

spectively.

[0026] In step S301, the input system information acquisition section 205 acquires the input system information of the input unit 201. In step S302, the output system information acquisition section 206 acquires the output system information of the output unit 208. That is, the characteristic information of each of the colorimetric data input section 202 and spectral distribution data input section 203 in the input unit 201 is acquired as input system information, and the characteristic information of the output unit 208 currently connected to the image processing unit 204, i.e., the colorimetric processing output unit 209, colorimetric/spectral distribution processing output unit 210, or spectral distribution processing output unit 211 is acquired as output system information,

[0027] To cause the output unit 208 connected to the image processing unit 204 to process and output the image data acquired in step S300, processing in steps S303 to S307 is executed by the output signal selection section 207, and image data having a signal format to be output to the output unit 208 is selected from the image data acquired by the input unit 201. Processing in the output signal selection section 207 will be described below.

[0028] In step S303, on the basis of the input system information acquired in step S301, pieces of information related to the input signal formats of the image data acquired by the input unit 201 are obtained. The input signal formats mean the signal formats of the image data acquired by the input unit 201, i.e., a "colorimetric form" corresponding to the image data acquired by the colorimetric data input section 202 and a "spectral distribution form" corresponding to the image data acquired by the spectral distribution data input section 203.

[0029] In step S304, on the basis of the output system information acquired in step S302, information related to the output signal format of image data that can be processed by the output unit 208 is obtained. The output signal format means the signal format of image data that can be processed by the output unit 208 currently connected to the image processing unit 204, i.e., a "colorimetric form" corresponding to the signal format of image data that can be processed by the colorimetric processing output unit 209, the "colorimetric/spectral distribution form" corresponding to the signal format of image data that can be processed by the colorimetric/spectral distribution processing output unit 210, or the "spectral distribution form" corresponding to the signal format of image data that can be processed by the spectral distribution processing output unit 211.

[0030] In step S305, on the basis of the information related to the output signal format obtained in step S304, the signal format of image data to be output from the image processing unit 204 to the output unit 208 is determined. More specifically, when the colorimetric processing output unit 209 is connected as the output unit 208, the "colorimetric form" is determined. When the

colorimetric/spectral distribution processing output unit 210 is connected, both the "colorimetric form" and the "spectral distribution form" are determined. When the spectral distribution processing output unit 211 is connected, the "spectral distribution form" is determined.

[0031] In step S306, image data having the output signal format determined in step S305 is selected from the image data acquired in step S300. The image data is output to the output unit 208 in step S307.

[0032] The image data output to the output unit 208 by the above steps has a signal format that matches the signal format that can be processed by the output unit 208. Hence, the output unit 208 can execute predetermined image processing on the basis of the image data received from the image processing unit 204 to generate an appropriate output signal and output the signal to an external device.

[0033] In the first embodiment, in accordance with the signal format that can be processed by the output unit 208 connected to the image processing unit 204, colorimetric data is output to the colorimetric processing output unit 209, both colorimetric data and spectral distribution data are output to the colorimetric/spectral distribution processing output unit 210, and spectral distribution data is output to the spectral distribution processing output unit 211.

[0034] As described above, according to the first embodiment, image data having a signal format that can be processed by the output unit 208 can be selected from image data acquired by the input unit 201 and supplied to the output unit 208. Hence, an image input apparatus in which the input signal format in the input unit 201 is not limited to the output signal format in the output unit 208 can be implemented. In other words, in an image input apparatus having the input unit 201 for inputting colorimetric data and spectral distribution data, one of the colorimetric processing output unit 209, colorimetric/spectral distribution processing output unit 210, and spectral distribution processing output unit 211 can be arbitrarily connected and used as the output unit 208.

[0035] Generally, as the colorimetric processing output unit 209, for example, a device for executing simple RGB data processing is assumed. However, as the colorimetric/spectral distribution processing output unit 210 or spectral distribution processing output unit 211, a multiple spectral distribution data processing device for realizing highly accurate color reproduction is assumed. Hence, according to the first embodiment, in the image input apparatus, a highly accurate color reproduction processing device (colorimetric/spectral distribution processing output unit or spectral distribution processing output unit) can be connected while maintaining the compatibility with an inexpensive normal device (colorimetric processing output unit).

Second Embodiment

[0036] The second embodiment of the present inven-

tion will be described below.

[0037] In the above-described first embodiment, an arrangement in which the input unit 201 has both the colorimetric data input section 202 and the spectral distribution data input section 203 has been described. In the second embodiment, only a spectral distribution data input section 203 is prepared as an input unit, and colorimetric data is generated in accordance with the output signal format of an output unit 208.

[Arrangement]

[0038] Fig. 4 is a block diagram showing the characteristic functional arrangement of an image input apparatus according to the second embodiment. The same reference numerals as in the above-described first embodiment denote the same components in Fig. 4, and a description thereof will be omitted.

[0039] The output signal selection section 207 in the first embodiment selects image data having a signal format to be output from image data having signal formats acquired by the input unit 201. However, an output signal selection section 404 in the second embodiment determines the signal format of image data to be output on the basis of the output signal format of the output unit 208 independently of the input signal format of an input unit 201.

[0040] As in the first embodiment, an output system information acquisition section 406 in an image processing unit 402 shown in Fig. 4 acquires the output system information of the output unit 208 (colorimetric processing output unit 209, colorimetric/spectral distribution processing output unit 210, or spectral distribution processing output unit 211) currently connected to the image processing unit 402. In the second embodiment, since only the spectral distribution data input section 203 is prepared as the input unit, no input system information acquisition section for acquiring input system information is prepared. However, an input system information acquisition section may be prepared, as in the first embodiment.

[0041] On the basis of the output system information acquired by the output system information acquisition section 406, the output signal selection section 404 determines the signal format of image data to be output from the image processing unit 402 to the output unit 208 from signal formats that are prepared in advance. The signal formats that are prepared in advance are the "colorimetric form", "colorimetric/spectral distribution form", and "spectral distribution form".

[0042] In the second embodiment, since only the spectral distribution data input section 203 is prepared as the input unit, no colorimetric data is input. Hence, when the "colorimetric form" or "colorimetric/spectral distribution form" is selected by the output signal selection section 404, a colorimetric data generation section 403 generates colorimetric data on the basis of spectral distribution data input from the spectral distribution data

input section 203. The colorimetric data generation method will be described later in detail.

[0043] Upon receiving the spectral distribution data from the spectral distribution data input section 203 and the colorimetric data from the colorimetric data generation section 403, an output signal switching section 405 switches image data to be output from the image processing unit 402 on the basis of the output signal format determined by the output signal selection section 404. More specifically, when the output signal format is the "colorimetric form", the output signal switching section 405 outputs only the colorimetric data. When the output signal format is the "colorimetric/spectral distribution form", the output signal switching section 405 outputs both the colorimetric data and the spectral distribution data. When the output signal format is the "spectral distribution form", the output signal switching section 405 outputs only the spectral distribution data.

[Generation of Colorimetric Data]

[0044] The colorimetric data generation method by the colorimetric data generation section 403 will be described here.

[0045] As the first method, received spectral distribution data is temporarily converted into device-independent colorimetric vector data and then converted into colorimetric data on the target colorimetric system (e.g., RGB system).

[0046] That is, when spectral distribution data received from the spectral distribution data input section 203 is integrated by convolution calculation of a color matching function in an appropriately selected colorimetric system, the spectral distribution data can be converted into colorimetric vector data (tristimulus values) having ternary values. As colorimetric vector data having ternary values, a device-independent colorimetric system such as an L*a*b* colorimetric system or XYZ colorimetric system is generally employed. Fig. 5 is a graph showing examples of color matching functions in the XYZ colorimetric system.

[0047] As the second method, three data are selected from a plurality of wavelength data contained in the received spectral distribution data, and these data are converted into ternary values of colorimetric data.

[0048] That is, the spectral characteristic of target colorimetric data is held in advance. Only data corresponding to the spectral characteristic of the colorimetric data are extracted from received spectral distribution data and converted into colorimetric data. For example, assume that colorimetric data contains RGB signals. Since RGB signals have spectral characteristics shown in Fig. 6, three wavelength data that exhibit the peaks of the RGB colors are extracted from the received spectral distribution data. On the basis of these data, RGB signal values can be generated.

[0049] As described above, according to the second embodiment, image data having an unacquired signal

format is generated as needed, thereby outputting image data having a signal format that can be processed by the output unit 208. Hence, as in the first embodiment, in an image input apparatus for acquiring only spectral distribution data, one of the colorimetric processing output unit 209, colorimetric/spectral distribution processing output unit 210, and spectral distribution processing output unit 211 can be arbitrarily connected and used as the output unit 208.

Other Embodiment

[0050] In the first embodiment, a case wherein the input unit 201 acquires colorimetric data and spectral distribution data has been described. In the second embodiment, a case wherein only spectral distribution data is acquired has been described. However, the present invention is not limited to these examples. Fig. 7 shows the correlation between the input signal format, the output signal format, and the signal format of image data to be output to the output unit. Referring to Fig. 7, the column wherein the input signal format is "colorimetric and spectral distribution form" corresponds to the above-described first embodiment, and the column wherein the input signal format is "spectral distribution form" corresponds to the second embodiment.

[0051] According to Fig. 7, when the input signal format is the "colorimetric form", i.e., when only colorimetric data is input from the input unit, no spectral distribution data can be formed on the basis of the colorimetric data. Hence, only when the output signal format is the "colorimetric form", appropriate image data (colorimetric data) can be output to the output unit. Otherwise, i.e., when the output signal format is the "colorimetric/spectral distribution form" or "spectral distribution form", image data having an appropriate signal format cannot be output to the output unit.

[0052] The correlation table shown in Fig. 7 is held in a memory (not shown) in the image input apparatus and looked up in, e.g., determining the output signal format on the basis of the signal formats of the input and output units in step S305 of Fig. 3. If the input signal format is the "colorimetric form", as described above, and the output signal has a form other than the "colorimetric form", i.e., when image data cannot be output to the output unit, the user is preferably notified of the error in step S305.

[0053] As described above, for all combinations of input and output signal formats, the signal format of corresponding image data is determined in advance. With this arrangement, not only as the output unit but also as the input unit, an input unit for receiving only colorimetric data, an input unit for receiving both colorimetric data and spectral distribution data, or an input unit for receiving only spectral distribution data can be arbitrarily connected to the image input apparatus and used.

[0054] Hence, the input and output units can be detached from the image input unit. Even when the attached input and output units use different signal for-

ats, an appropriate image processing can be executed.

[0055] In the above-described embodiments, RGB data is most generally used as colorimetric data.

[0056] As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

Claims

1. An image processing apparatus comprising:
 - an input unit, arranged to input image data;
 - an output unit, arranged to output the image data to an external device; and
 - a controller, arranged to control a signal format of the image data to be supplied from said input unit to said output unit on the basis of a signal format of image data that can be processed by said output unit.
2. The apparatus according to claim 1, wherein said controller acquires information related to an input signal format of image data that can be input by said input unit and information related to an output signal format of the image data that can be processed by said output unit and, on the basis of the acquired information related to the input and output signal formats, controls the signal format of the image data to be supplied from said input unit to said output unit.
3. The apparatus according to claim 2, further comprising a converter, arranged to convert the signal format of the image data input from said input unit, wherein when image data having a signal format corresponding to the output signal format is not input from said input unit, said controller supplies image data obtained by converting the signal format by said converter to said output unit.
4. The apparatus according to claim 1, wherein said input unit comprises an image sensing device for acquiring image data of an object.
5. The apparatus according to claim 1, wherein the signal format includes a colorimetric form, spectral distribution form, and colorimetric and spectral distribution form.
6. The apparatus according to claim 5, wherein image data having the colorimetric form is RGB data.
7. The apparatus according to claim 1, wherein said

input unit and/or output unit can be detached.

8. A control method of an image processing apparatus which has an input unit arranged to input image data and an output unit arranged to output the image data to an external device, comprising the step of: 5

controlling a signal format of the image data to be supplied from the input unit to the output unit on the basis of a signal format of the output unit. 10

9. The method according to claim 8, wherein in said controlling step, information related to an input signal format of image data that can be input by the input unit and information related to an output signal format of the image data that can be processed by the output unit are acquired, and on the basis of the acquired information related to the input and output signal formats, the signal format of the image data to be supplied from the input unit to the output unit is controlled. 15 20

10. The method according to claim 9, further comprising the steps of: 25

converting the signal format of the image data input from the input unit; and
when image data having a signal format corresponding to the output signal format is not input from the input unit, supplying image data obtained by converting the signal format to the output unit. 30

11. A computer program product storing a computer readable medium comprising a computer program code, for a control method of an image processing apparatus which has an input unit arranged to input image data and an output unit arranged to output the image data to an external device, comprising process procedure code for controlling a signal format of the image data to be supplied from the input unit to the output unit on the basis of a signal format of the output unit. 35 40

12. The product according to claim 11, wherein in said controlling process, information related to an input signal format of image data that can be input by the input unit and information related to an output signal format of the image data that can be processed by the output unit are acquired, and on the basis of the acquired information related to the input and output signal formats, the signal format of the image data to be supplied from the input unit to the output unit is controlled. 45 50

13. The product according to claim 12, further comprising process procedure code for: 55

converting the signal format of the image data input from the input unit; and
when image data having a signal format corresponding to the output signal format is not input from the input unit, supplying image data obtained by converting the signal format to the output unit.

FIG. 1

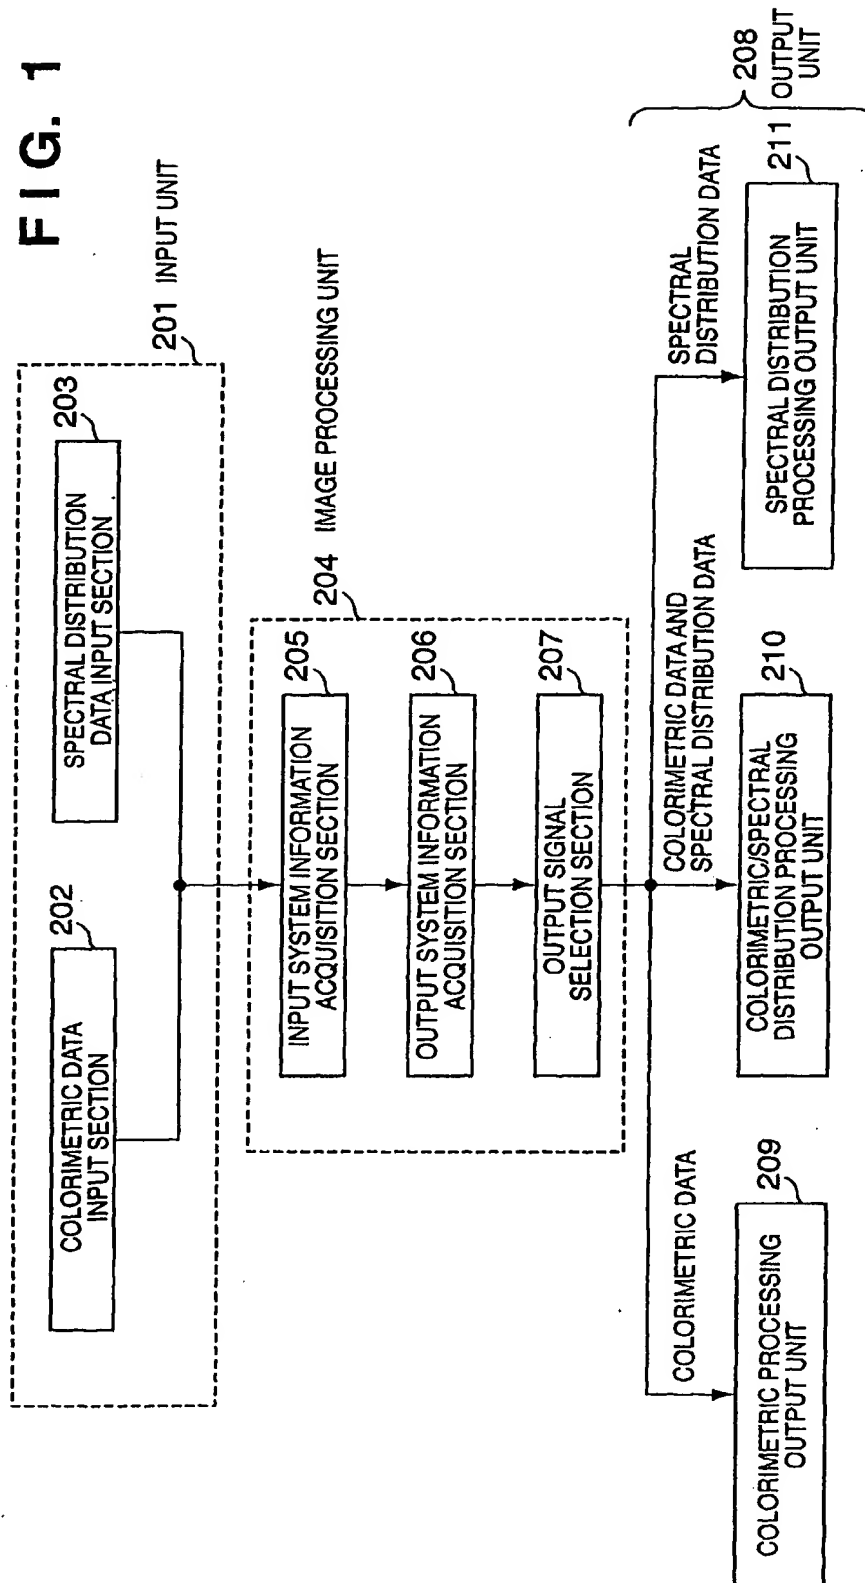


FIG. 2

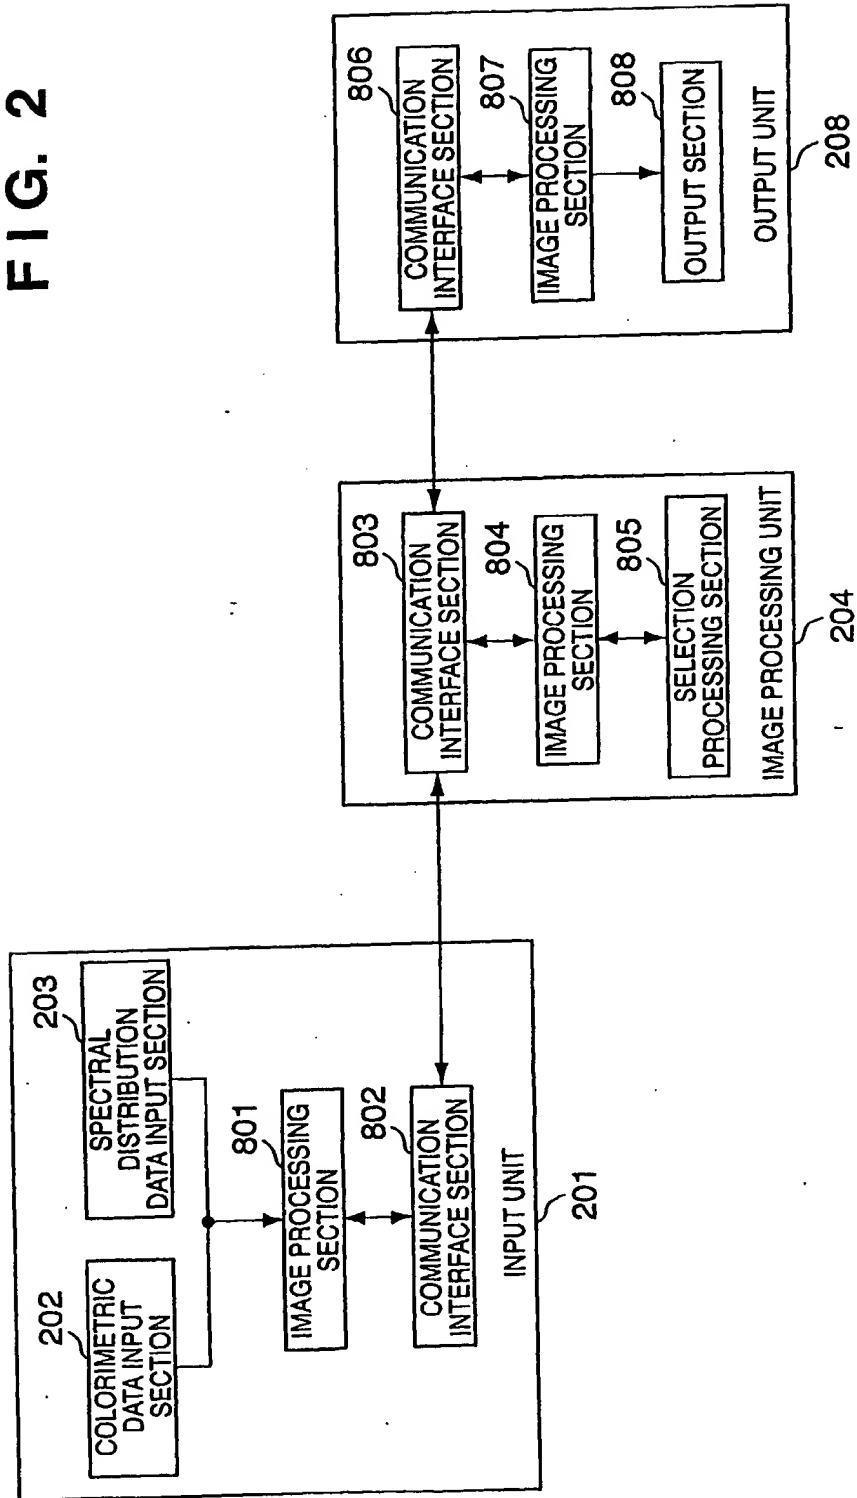
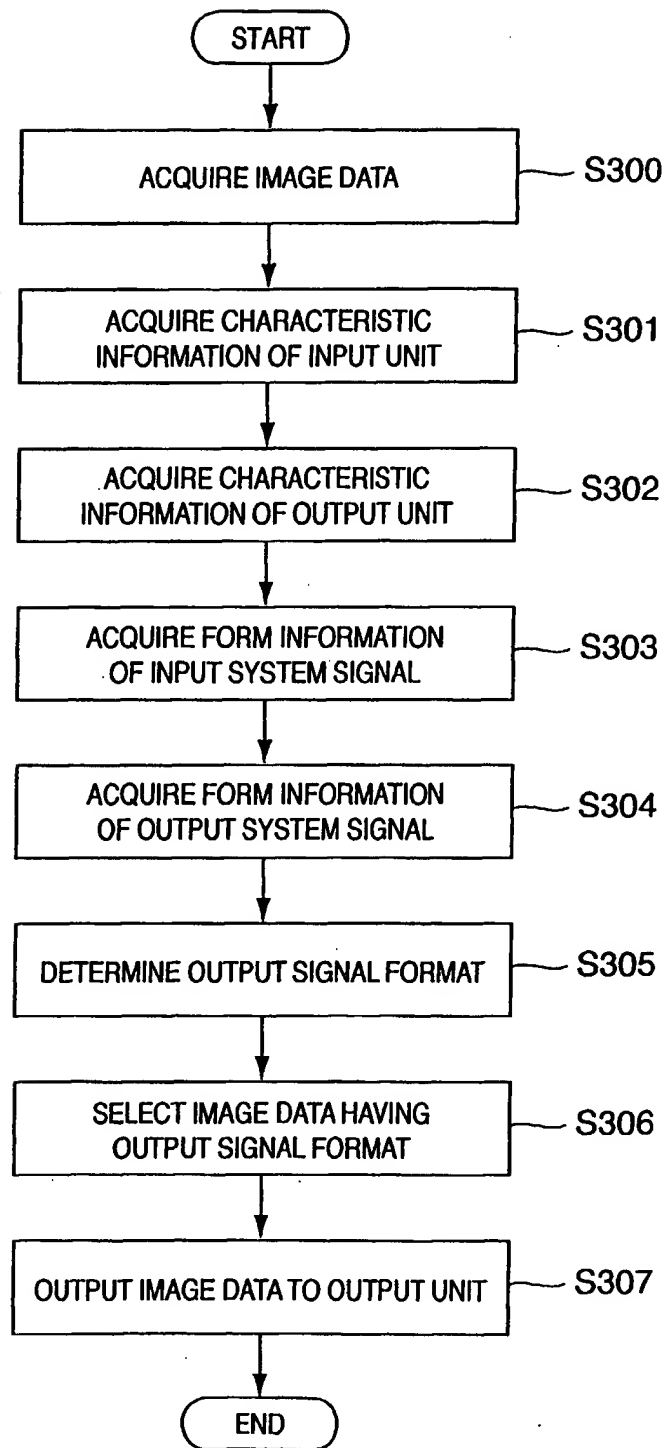


FIG. 3

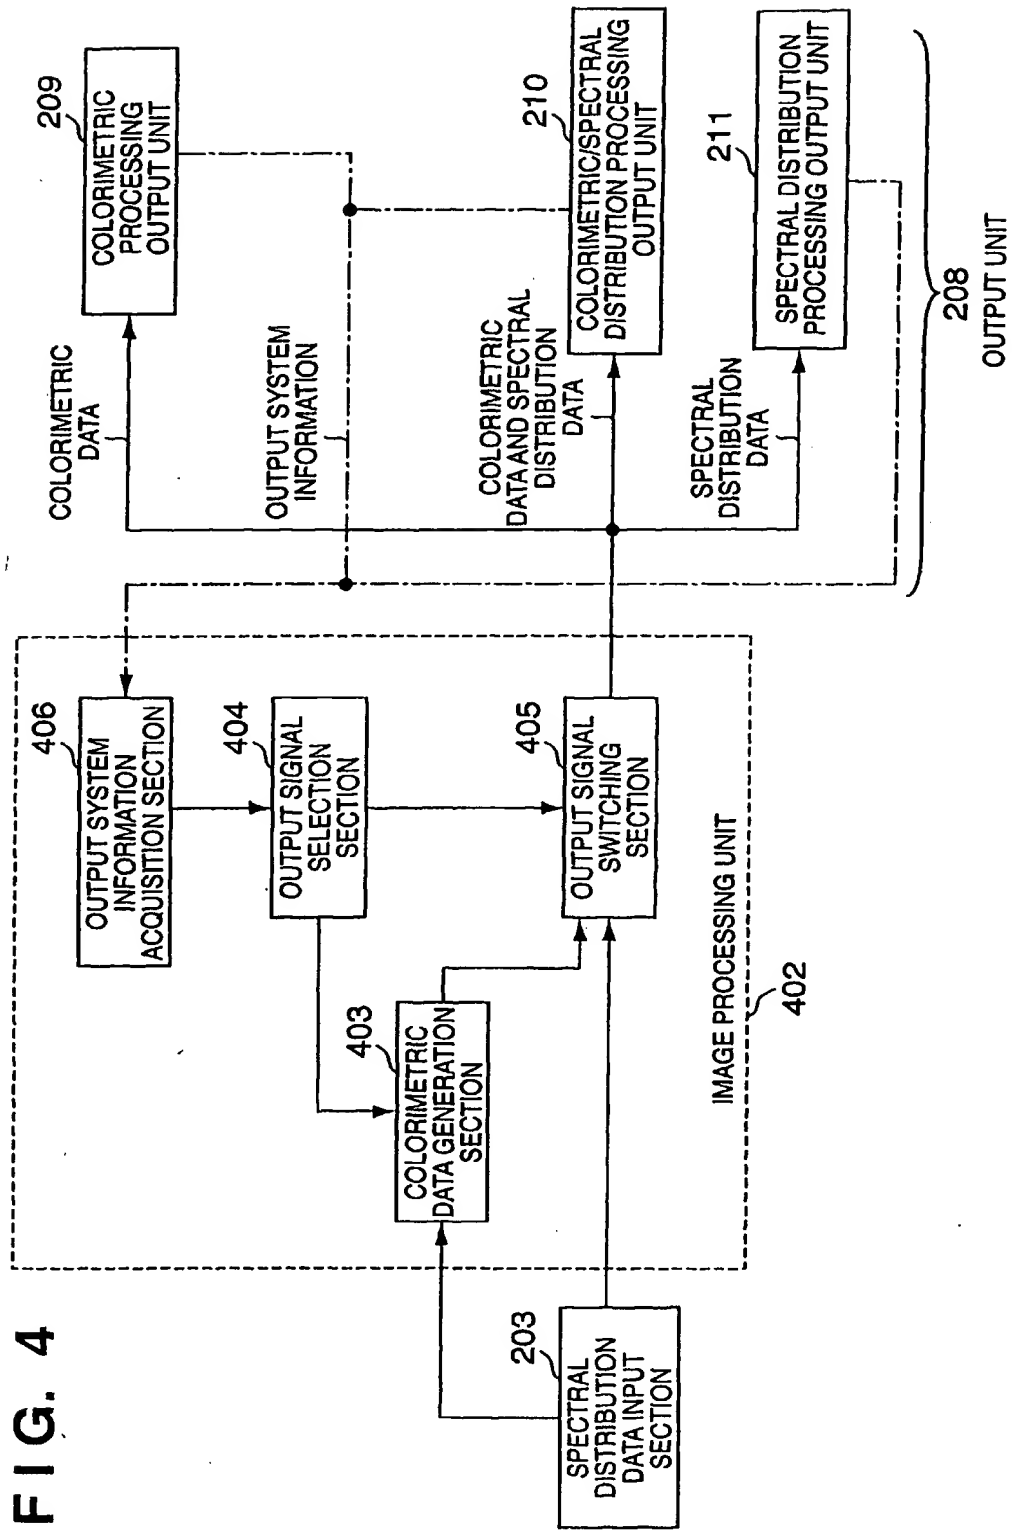


FIG. 5

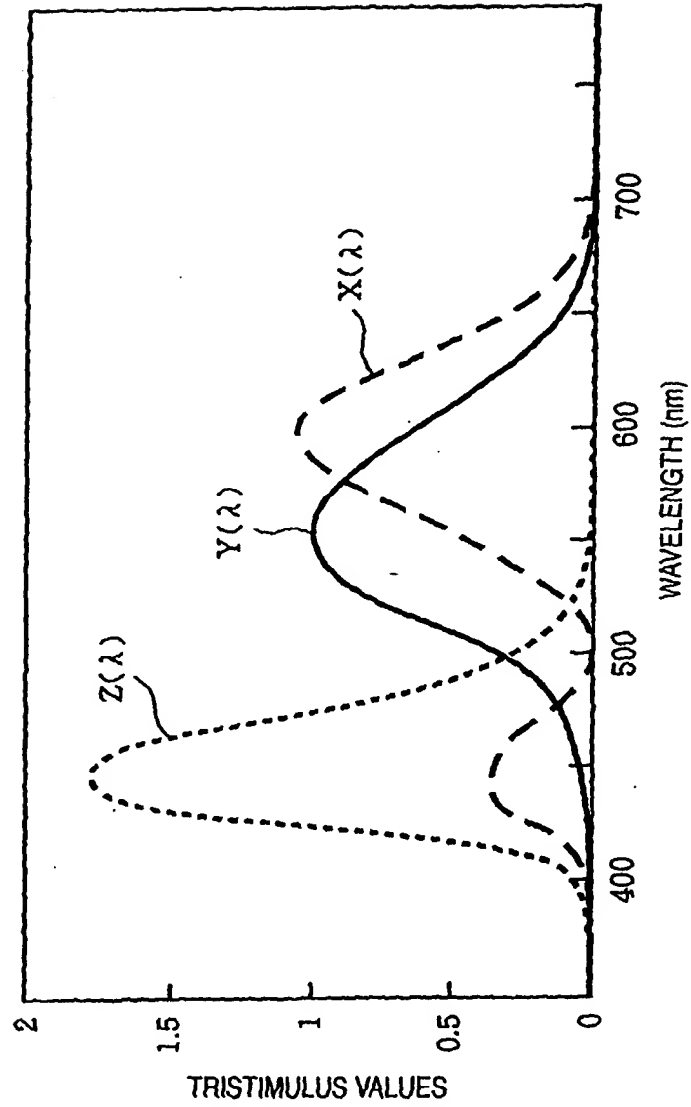


FIG. 6

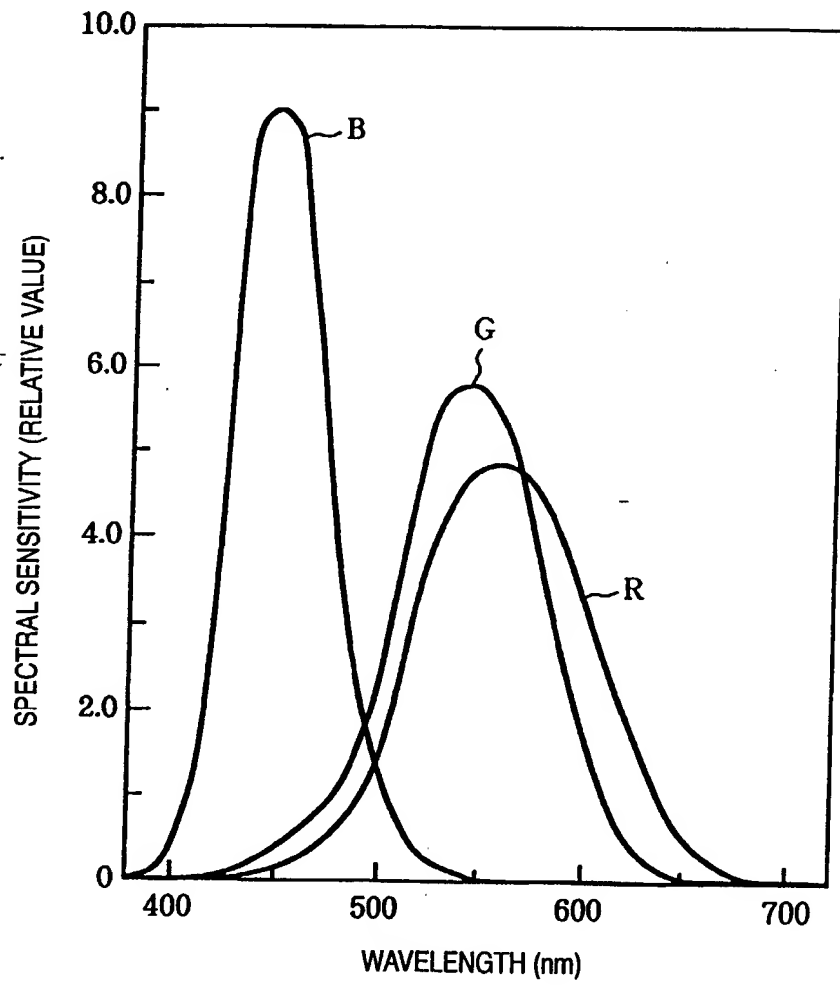


FIG. 7

INPUT SIGNAL FORMAT OUTPUT SIGNAL FORMAT	COLORIMETRIC FORM	COLORIMETRIC AND SPECTRAL DISTRIBUTION FORM	SPECTRAL DISTRIBUTION FORM
	COLORIMETRIC FORM	COLORIMETRIC DATA	(GENERATE) COLORIMETRIC DATA
COLORIMETRIC AND SPECTRAL DISTRIBUTION FORM	IMPOSSIBLE	COLORIMETRIC AND SPECTRAL DISTRIBUTION DATA	(GENERATE) COLORIMETRIC AND SPECTRAL DISTRIBUTION DATA
SPECTRAL DISTRIBUTION FORM	IMPOSSIBLE	SPECTRAL DISTRIBUTION DATA	SPECTRAL DISTRIBUTION DATA



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 9746

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 581 590 A (CANON KK) 2 February 1994 (1994-02-02) * abstract; figures 1,8,9; tables 3,4 *	1-13	H04N1/46
A	US 5 864 364 A (OBI TAKASHI ET AL) 26 January 1999 (1999-01-26)		
A	EP 0 616 200 A (HITACHI LTD) 21 September 1994 (1994-09-21)		
A	US 5 634 092 A (STOKES MICHAEL) 27 May 1997 (1997-05-27)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04N
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 18 February 2002	Examiner Kassow, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02.92) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9746

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-02-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0581590	A	02-02-1994	JP 6054176 A	25-02-1994
			DE 69323809 D1	15-04-1999
			DE 69323809 T2	16-09-1999
			EP 0581590 A2	02-02-1994
			US 5699489 A	16-12-1997
			US 5923824 A	13-07-1999

US 5864364	A	26-01-1999	JP 9172649 A	30-06-1997

EP 0616200	A	21-09-1994	JP 6273322 A	30-09-1994
			DE 69413277 D1	22-10-1998
			DE 69413277 T2	04-03-1999
			EP 0616200 A1	21-09-1994
			US 5547369 A	20-08-1996

US 5634092	A	27-05-1997	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82